

EXPERT EPOXY PRIMER

Expert Epoxy Primer is used as a primer in two component epoxy system where corrosion perfection is highly demanded is highly demanded.

- COLOUR - Grey and Red Oxide
- PACKAGE - 4Litres and 20Litres
- BINDER - Epoxy Polyamide
- PIGMENTS - Light and weather resistant, Inorganic/organic pigments extenders.
- SOLVENTS - Aromatic Hydrocarbon, Alcohol & Kerosene
- VISCOSITY - APROX 900 CP @20°C
- SPECIFIC GRAVITY - Aprox. 16 for Oxide red shade base.
- GLOSS (600c) - Semi - Flat 15-20°C
- SOLID BY WEIGHT - 75% shade. Red Oxide Base + Curing Agent
- SPREADING RATE - 102m² per Litre @ 50 (micron) DFT (Theoretical)
- POT LIFE - 8 Hours at 20°C
- DRYING LIFE - 46 Hours at 20c dry to Handle
- FILM PROPERTIES - Expert Epoxy Primer is a hard wearing & Robust Film after curing
- STORAGE - Over one year in a closed container.



APPLICATION METHOD

Expert Epoxy Primer: Can be applied IN SO (micron) DFT by brush, roller airless spray. After mixture of base + curing agent, leave for 1/2 hour before spraying.

APPLICATION: Brush and Roller. Approx 20% of thinner should be added. Conventional Spray - 25 - 30 seconds in DIN 4 cup at 20°C.

Airless spray 30-40 seconds in DIN 4 at 20°C.

PRE- TREATMENT - Thorough and sand blasting cleaning should be done to 2½ - 3

Metals like aluminum and zinc without chemical pre-treatment of the surface or application of wash primer

- PACKAGING - 4 Liters and 20Litres
- COVERAGE - 14-15m²per Litre
- THINNER - White Spirit
- DRYING - Touch Dry 3 hours

EXPERT PAINTS EPOXY ROAD MARKING PAINT

This epoxy road marking paint is good for exterior and interior surfaces. It has Exceptional high adhesion and cohesion property, high scratch and water resistance

- COLOUR - Available in all colours
- PACKAGING - 4 Litres, and 20 Litres (1:44v/v)
- VISCOSITY - Approx 1000 (20°C)
- APPLICATION - A fast drying permanent marking paint for asphalt and concrete interior and exterior

Paint visibility at night can be enhanced by scattering glass beads designed for this purpose on the paint coat, immediately after paint application, while the paint is still wet. in quantities of 100 - ISO grams per square meter

Do not apply when temperature is below 5°C or above 40°C.


EXPERT SCREEDING FILLER

- Tough. Durable, Fast dry and smooth finish for all interior and exterior use.
- Covers 25-30m² per bucket depending on the surface
- Resist water when dried
- Available In 20 litre bucket with weight of 30kg



EXPERT DESIGNER PUTTY

- Tough. Durable, fast dry and smooth finish for all interior and exterior use.
 - Covers 30-35m² Per bucket depending on the surface resist water when dried.
 - Resist water when dried
 - Available In 20 litre bucket with weight of 30kg
 - Can come in different colours
- Good for design work

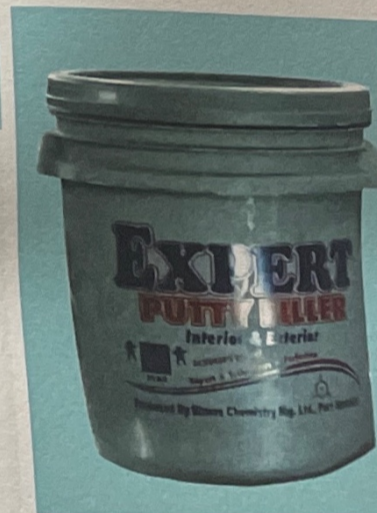

SANDY TROWEL

The cullet comes in different colour combinations like three colour combination of Blue Red and White, or Black, Cream and Wine, or two colour combination of Blue and White or Red and White etc



EXPERT SPECIAL DECORATIVE PAINTS

1. EXPERT METALLIC

Have smooth glassy outlook. Washable, durable and appealing to eyes. It comes in different colours, but rich brown colour is more appealing to portray the ancient historic artwork.

It is usually sold per square meter, for both materials and labour for painting.

2. EXPERT DABBING PAINT

It comes in different patterns and colour combinations.

STENCIL CROCODILE EFFECT



ANIMAL SKIN EFFECT



FLEXY ANIMAL



CROCODILE SKIN

